

MULTIFUEL ENGINE

2.5 Liter

For Industrial Application

H25




(Some parts optional)

SPECIFICATION DATA

Intermittent output (SAE Gross J1349)	62 Hp/3,200 rpm
Continuous output (SAE Gross J1349)	56 Hp/3,200 rpm
Peak torque (SAE Gross J1349)	132 ft-lb/1,600 rpm
Minimum fuel consumption	210 g/Hp-hr/2,600 rpm
Fuel and type	Gasoline, (LPG & Natural gas) 4-cycle, O.H.V.
Cylinder arrangement	4 in-line
Combustion chamber	Wedge shape
Bore x stroke	92.0 mm x 93.0 mm
Total piston displacement	2,472 cc
Compression ratio	8.7 : 1
Length x width x height (standard model)	772.1 x 563 x 673 mm
Dry weight (standard model)*	157 kg

*Excl. ship loose parts.

PERFORMANCE CURVE

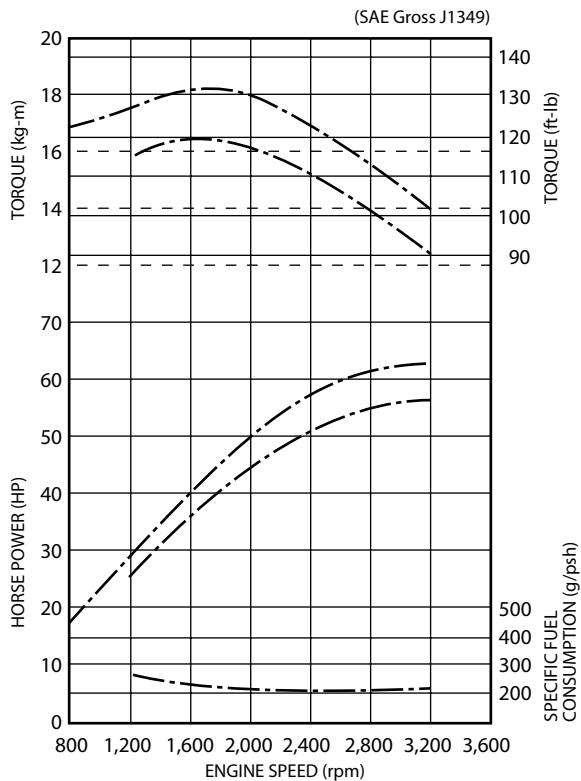

Curve 1; Intermittent Gross Output

This is the highest output obtainable at SAE standard ambient conditions from a basic engine equipped only with the built-in accessories essential to its operation. These levels may be only maintained for operating period of short duration.

Applications: Scissorlifts, Aerial platforms, Scrubber/sweepers, Utility vehicles, Construction equipment

Curve 2; Continuous Gross Output

This is the output which can be obtained at SAE standard ambient conditions from a basic engine, operating in a continuous duty mode.

Applications: Generators, Welders, Water pumps, Air compressors, etc.

ZENITH
POWER PRODUCTS LLC

14570 INDUSTRIAL PARK ROAD
BRISTOL, VA 24202

STANDARD EQUIPMENT

EQUIPMENT	FEATURES
Exhaust manifold	Center download outlet type
Cylinder head gasket	Non asbestos
Fuel pump	Mechanical type
Flywheel	Flat Face
F/W Housing	Forklift type
Cooling fan	Pusher; 380 mm dia x 6F
Fan pulley (W/P pulley)	Water pump to crank pulley ratio; 1:1.01
Water pump	Centrifugal type, driven by V belt
Oil pan	Pressed steel plate, capacity high 3.5 liter
Oil filter	Replacement paper element type
Thermostat	Wax pellet type, 76.5° C
Distributor	Ignition coil built in full transistor type
Spark plug	Grade (NGK) BPR4ES
Alternator	12V-50A (IC regulator built-in type)
Starter motor	12V-1.2kw, Reduction type

OPTIONS

EQUIPMENT	FEATURES
Electronic fuel injection	Includes electronic governor
Exhaust manifold	Upswept
Governor	Pneumatic governor, Electronic governor *Governed speed can be changed upon customer request
Fan Pulley	Fan to crank pulley ratio; 1:0.92, 1.01, 1.10, 1.25
Exhaust manifold	Front side upward outlet, Flange type 2 bolts
Fan spacer	10, 15, 20, 27, 31, 35, 45 mm
Air horn	For remote air cleaner (Dry)
Alternator	12V-35A (IC regulator built-in type)
Flywheel	SAE For 8. o/c clutch
F/W Housing	SAE #4 Housing

** Please consult with Zenith Power Products Engine Distributors, when you need other items*

Design and specifications are subject to change without notice.

For further information, please contact:

Ray Prussing - rprussing.zpp@zenithfuelsystems.com

Otto Aliffi - oaliffi.zpp@zenithfuelsystems.com

www.zenithpowerproducts.com | 276.645.8679

